

WO 2005/112157 A2

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
24 November 2005 (24.11.2005)


PCT

(10) International Publication Number
WO 2005/112157 A2

- (51) International Patent Classification⁷: **H01M 8/00** [JP/JP]; c/o Yamaha Hatsudoki Kabushiki Kaisha, 2500, Shingai, Iwata-shi, Shizuoka 438-8501 (JP).
- (21) International Application Number: **PCT/JP2005/008661** (74) Agent: TATSUMI, Tadahiro; 8th floor, Ueroku Shinkosan Bldg., 2-11, Uehommachi 5-chome, Tennoji-ku, Osaka-shi, Osaka 543-0001 (JP).
- (22) International Filing Date: 2 May 2005 (02.05.2005)
- (25) Filing Language: English (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English
- (30) Priority Data: 2004-143410 13 May 2004 (13.05.2004) JP (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
- (71) Applicant (for all designated States except US): YAMAHA HATSUDOKI KABUSHIKI KAISHA [JP/JP]; 2500, Shingai, Iwata-shi, Shizuoka 438-8501 (JP).
- (72) Inventor; and (75) Inventor/Applicant (for US only): KOHDA, Hideo

[Continued on next page]

(54) Title: FUEL CELL SYSTEM AND TRANSPORTATION APPARATUS INCLUDING THE SAME

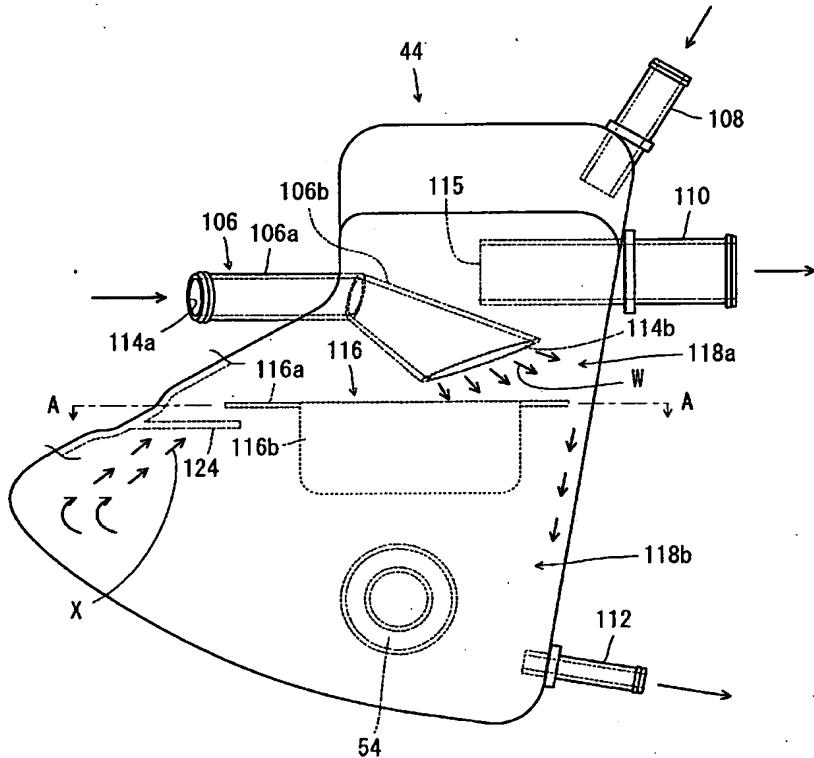

(57) Abstract: The present invention provides a fuel cell system that is capable of collecting water from the fuel cell easily and efficiently without depending upon a large component or decreasing power generation efficiency. The fuel cell system 10 includes: a fuel cell 12 which generates electric energy by an electro-chemical reaction; a water tank 44 which stores water from the fuel cell 12; an intake pipe 106 which has an inlet port 114b for introducing moisture-containing exhaust gas from the fuel cell 12 into the water tank 44 and is connected with the water tank 44; an exhaust pipe 110 which has an exhaust port 115 for exhausting gas from the water tank 44 and is connected with the water tank 44; and a partition member 116 which is provided in the water tank 44 at a position lower than the inlet port 114b for partitioning an interior of the water tank 44 into an upper space 118a and a lower space 118b.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- without international search report and to be republished upon receipt of that report